


**DANCO**<sup>®</sup>

SPECIALTY ADHESIVE TAPES

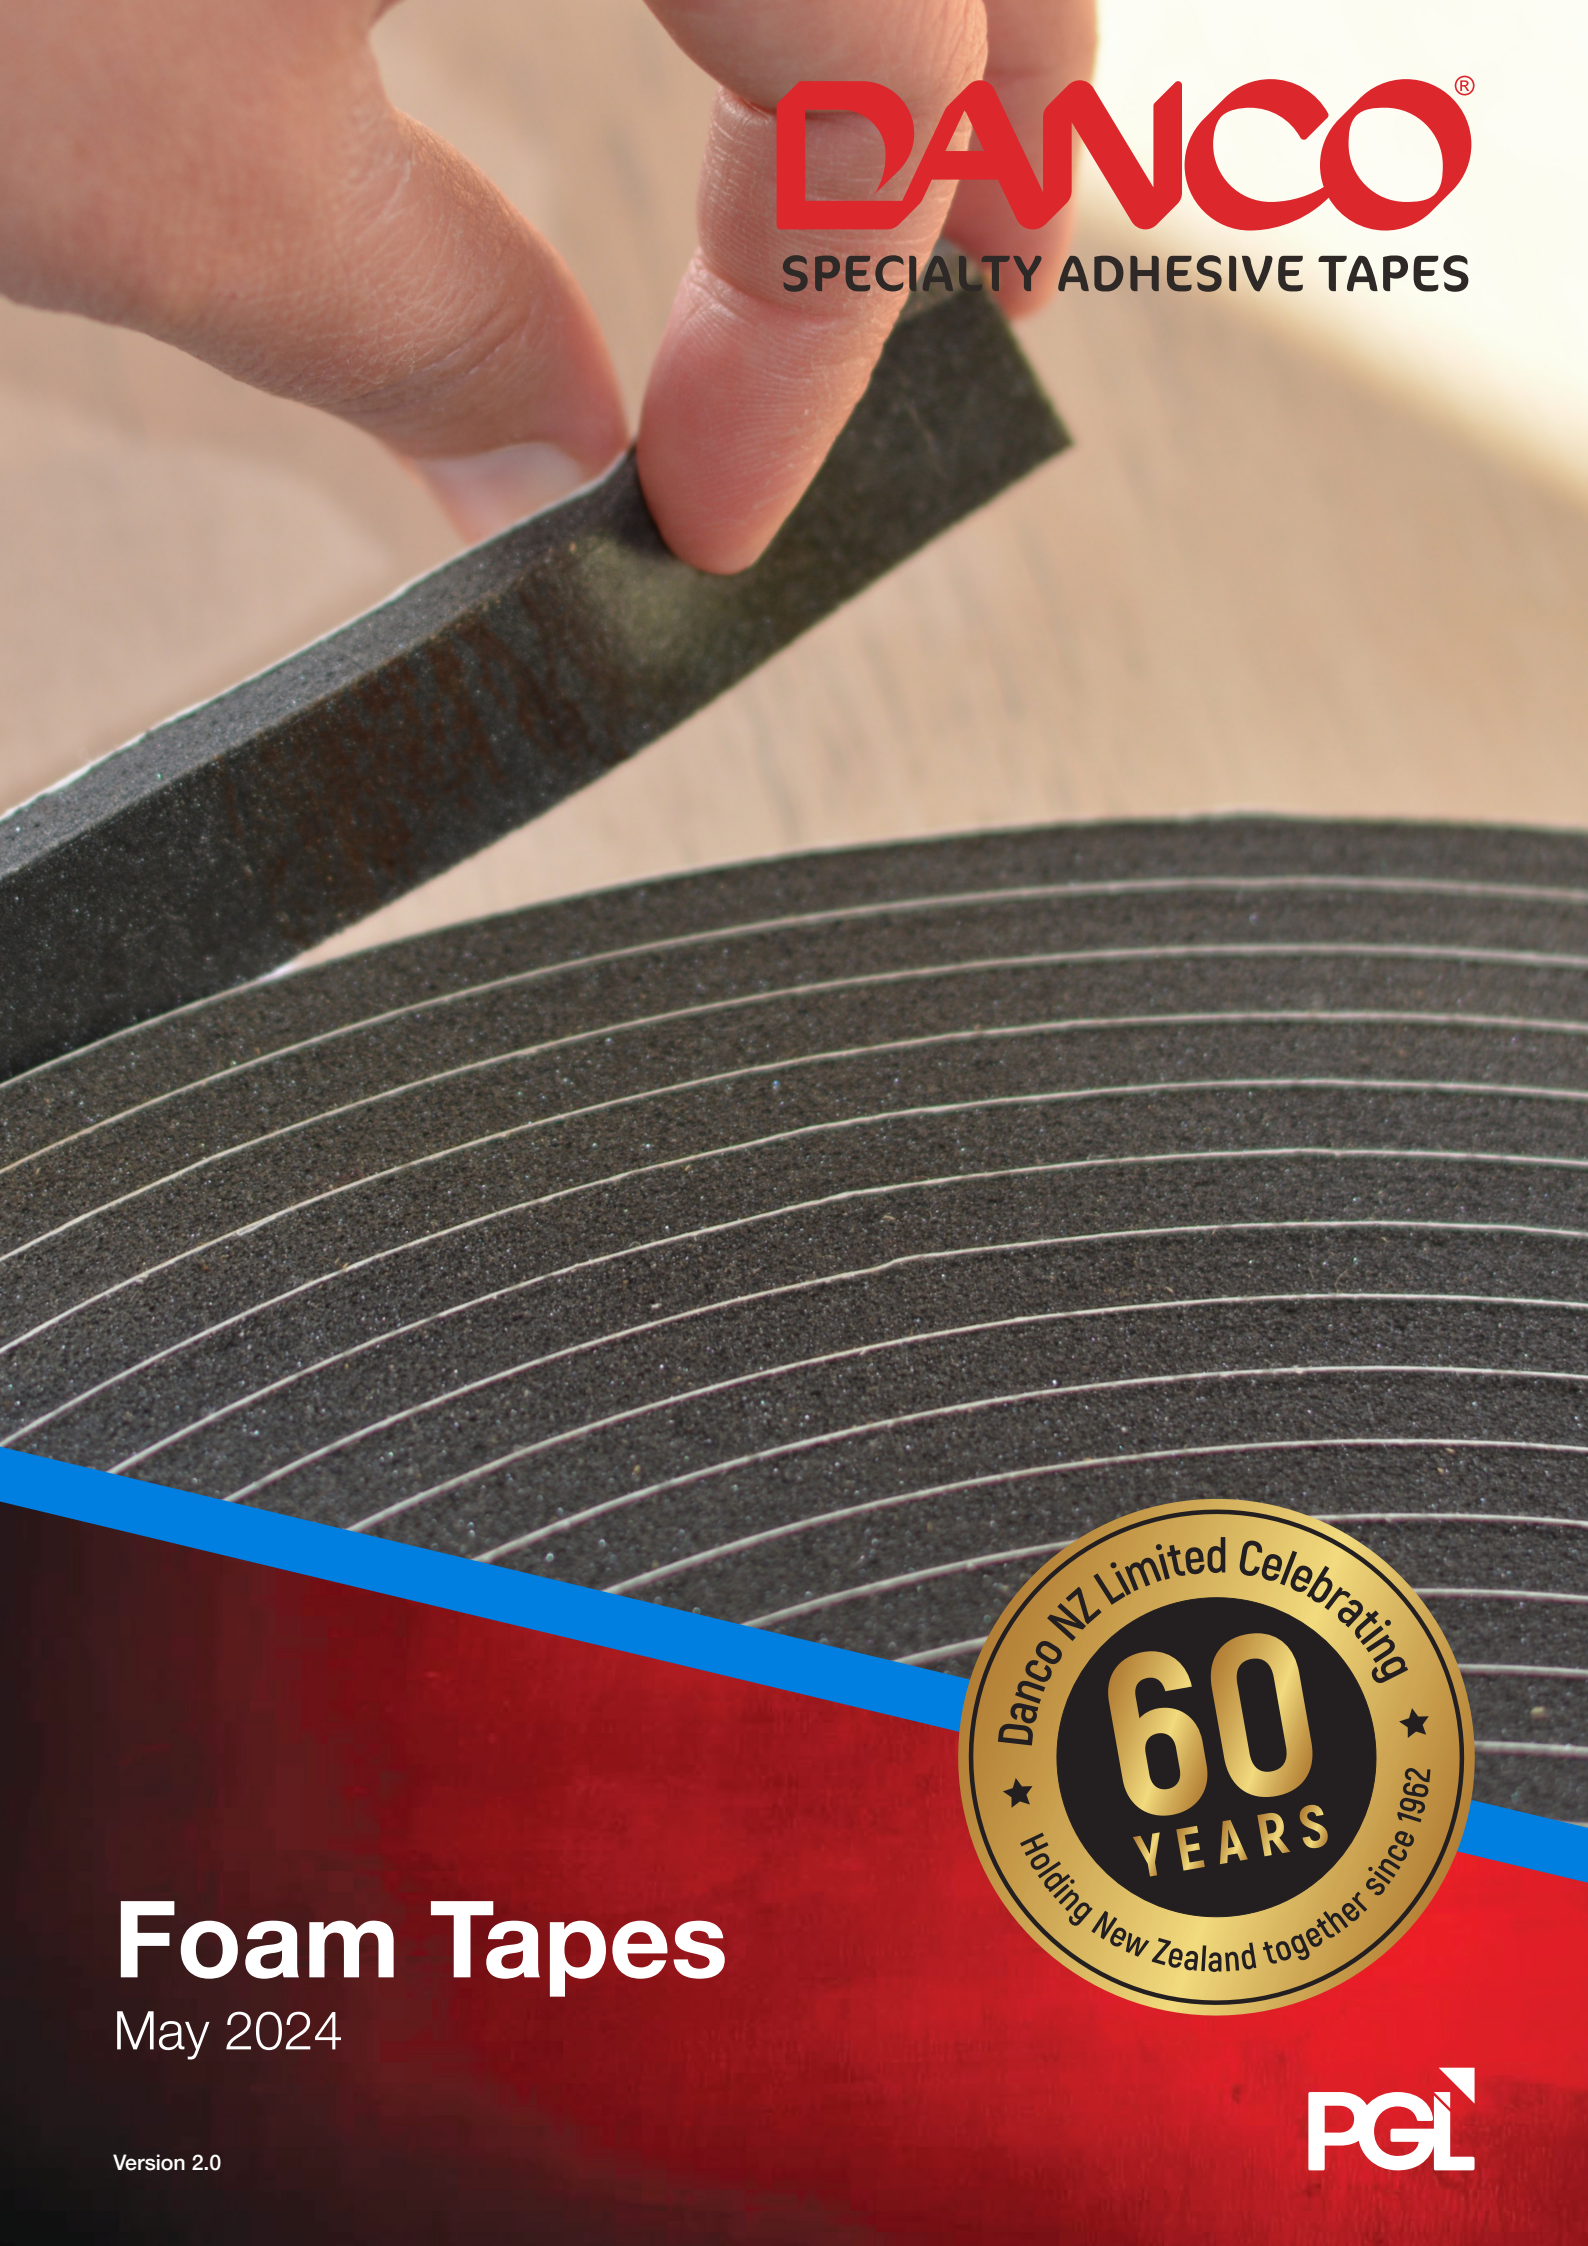

# Foam Tapes

May 2024

---

## **DAN73 Polyethylene Foam**

Produced from a dense cross linked polyethylene foam. This fine, closed cell composition provides high strength a smooth surface and excellent compression recovery properties.

Colour: Grey      Thicknesses: 3.0mm / 6.0mm / 10.0mm

---

## **DAN74 EPDM Foam**

This is a closed cell EPDM(Ethylene Propylene Diene Monomer) foam which has a high consistent cell structure with no voids. For use in construction or marine applications as a seal against dust, air or water.

Colour: Black      Thicknesses: 3.0mm / 6.0mm / 9.0mm / 12.0mm

---

## **DAN75 PVC/Nitrile Foam**

A closed cell soft grade skinned PVC/Nitrile foam coated with an aggressive adhesive, that is suitable for all general purpose sealing and closure applications. Ideal to insulate against temperature, sound and vibration and is UV and chemical resistant.

Colour: Black      Thicknesses: 3.0mm / 6.0mm / 9.0mm

---

## **DAN76 Polymeric Foam**

A closed cell foam which exhibits excellent dimensional stability, cushioning and vibration dampening qualities, whilst offering UV resistance and chemical resistance. Does not become brittle or exhibit loss of properties over time and wide temperature range. Ideal for more sophisticated industrial, automotive and construction applications.

Colour: Black      Thicknesses: 1.6mm / 3.2mm / 4.8mm / 6.4mm / 9.5mm / 12.7mm

---

## **DAN77 Soft PVC Foam Tape**

A general purpose, foam tape ideal for use in non-critical applications requiring positive seals on irregular surfaces or when flex and conformability to seal tight radius curves are required. Closed cell structure completely seals out air, moisture, light and dust when compressed at least 30%.

Colour: Black      Thicknesses: 3.2mm / 6.4mm / 9.5mm / 12.7mm / 19.0mm

---

## **DAN78 Medium PVC Foam Tape**

Excellent dimensional stability and a cushion against heavier loads. Foam density permits clean die-cuts and swirl free fastener penetration.

Colour: Black      Thicknesses: 1.6mm / 3.2mm / 4.8mm / 6.4mm / 9.5mm



Standard widths for most tape products are 18mm, 24mm, 36mm, 48mm, 72mm, 96mm and 144mm.

Custom slitting to your required width is available subject to consultation and approval with your local Danco® Sales Consultant.

DANCO self-adhesive tapes are successfully used in many fields of application to solve a variety of problems. Our catalogues give numerous examples as suggestions for your own problems. Each DANCO tape has been developed for a specific application. However, experience shows that, even for the same application, requirements can differ from case to case. Therefore, we suggest that you conduct tests to ensure that the DANCO tape you have in mind is suitable for your particular application. Our technical department and sales consultants will be pleased to assist you. All information and advice is given in good faith based on practical experience, but without any guarantee.